




# HTC Desire V Speaker Replacement

This guide will outline how to remove and replace the main rear speaker of the HTC Desire V smartphone.

Written By: William McCusker

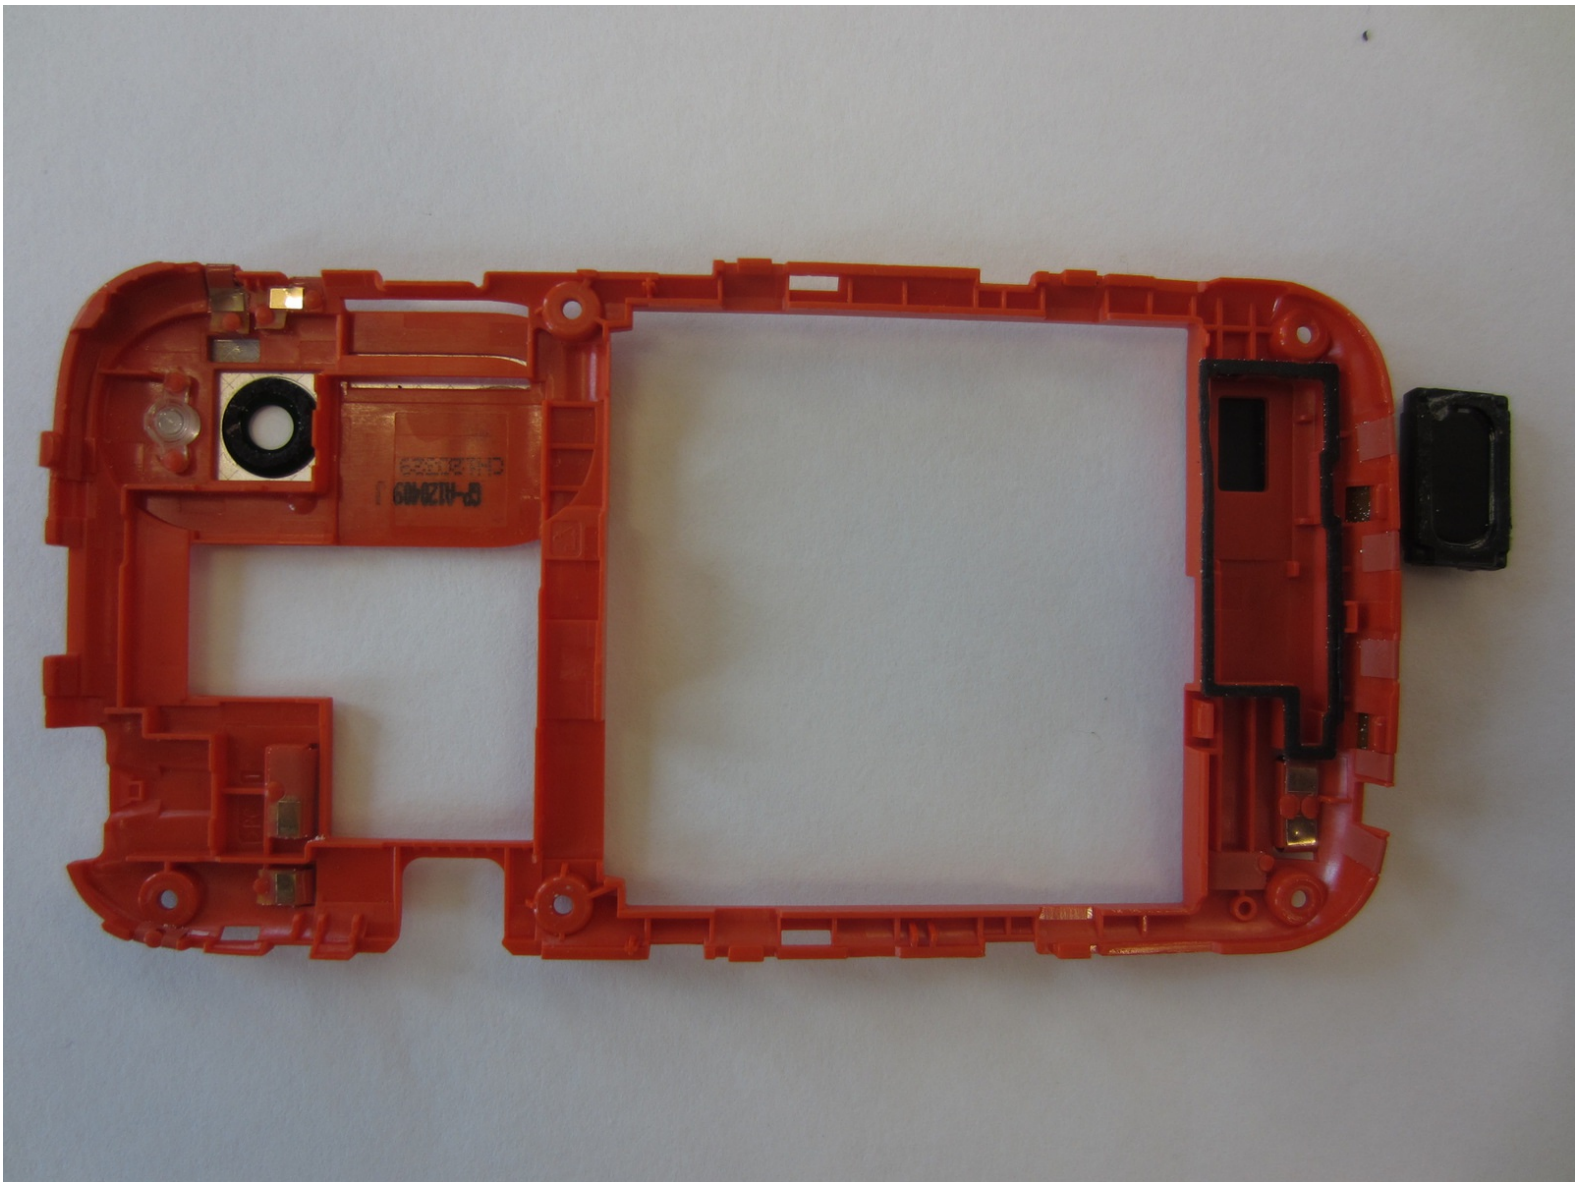

## INTRODUCTION

This guide will outline how to remove and replace the main rear speaker of the HTC Desire V smartphone.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- Gently pry back cover away from phone
- If you are having difficulty you may need to use a Spudger or plastic opener


## Step 2



- Lever the battery out from the bottom end first.
- If you have trouble you can use the opening tools or the spudger again



## Step 3 — Midframe

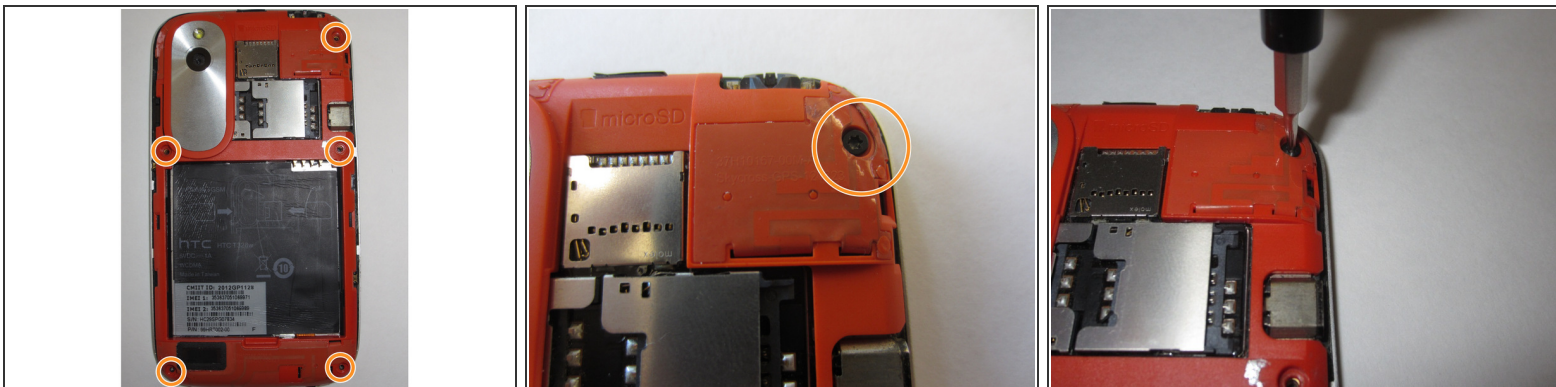


- Unscrew and remove five 3.0 mm black torx screws at the positions circled in orange.
- Use a Torx T5 screwdriver

## Step 4



- Using an opening tool or a spudger, gently remove the plastic backing

## Step 5 — Speaker

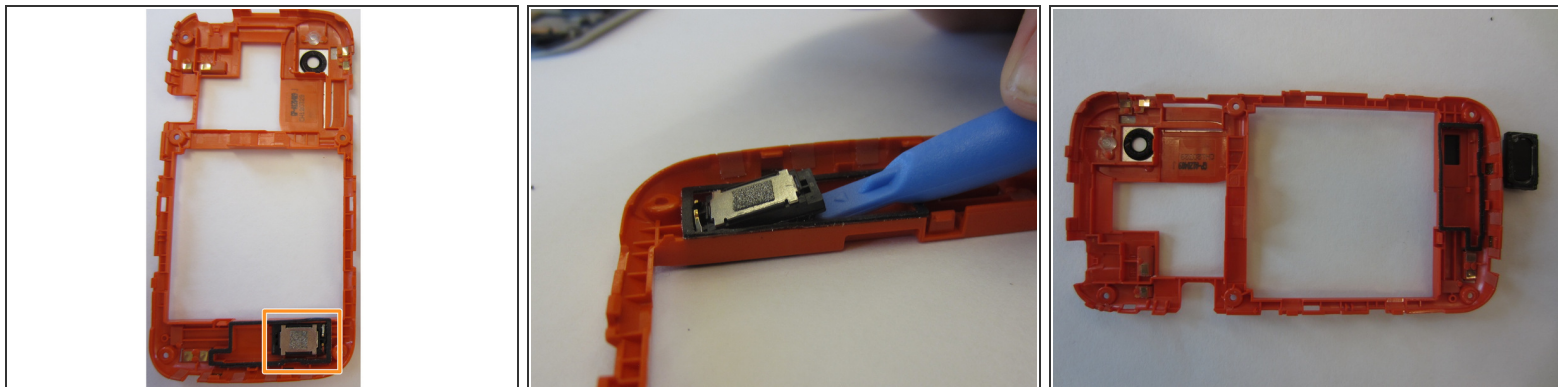

- Using a smaller prying tool, spudger or similar, lever up the speaker at the bottom end of the phone shown in the picture (bottom right)
- The bottom is sticky, so expect some resistance

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-30 05:18:42 AM.